

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61L 27/00, C01B 25/45 C08G 63/66, 65/34	A1	(11) International Publication Number: WO 90/12605 (43) International Publication Date: 1 November 1990 (01.11.90)
(21) International Application Number: PCT/US90/02281 (22) International Filing Date: 25 April 1990 (25.04.90) (30) Priority data: 345,034 27 April 1989 (27.04.89) US (71) Applicants: SRI INTERNATIONAL [US/US]; 333 Ravenswood Avenue, Menlo Park, CA 94025-3493 (US). UNIVERSITY OF UTAH [US/US]; 295 Chipeta Way, Suite 280, Salt Lake City, UT 84108 (US). (72) Inventors: DANIELS, Alma, U. ; 933 Newberry Road, Salt Lake City, UT 84108 (US). HELLER, Jorge ; 45 Skywood Avenue, Woodside, CA 94062 (US).		(74) Agents: CHEN, John, Y.; SRI International, 333 Ravenswood Avenue, Menlo Park, CA 94025-3493 (US) et al. (81) Designated States: AT (European patent), BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: BIODEGRADABLE COMPOSITES FOR INTERNAL MEDICAL USE (57) Abstract A family of composites suitable for use as materials of construction for implantable medical devices is disclosed. In the most preferred embodiment, the substrate polymer is an ortho ester polymer formed by the reaction of a ketene acetal having a functionality of two or more with a polyol. Also in the most preferred embodiment, the reinforcement material in the composites is calcium-sodium metaphosphate ("CSM") fibers. In other embodiments, the composites may replace either (but not both) of the substrate or the reinforcement with materials of the art.		

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
DE	Germany, Federal Republic of	LU	Luxembourg	TC	Togo
DK	Denmark			US	United States of America

5

-1-

BIODEGRADABLE COMPOSITES FOR INTERNAL MEDICAL USE

10

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to biodegradable
15 composites for internal use. That is, it relates to
composites made up of biodegradable substrate and a bio-
degradable reinforcement which can be used internally in
the body of a human or animal for bone fixation or the
like. In this use, the composites gradually completely
20 degrade to soluble products. In preferred embodiments,
this invention relates to the use of poly(ortho esters) as
the erodible substrate and to the use of calcium-sodium
metaphosphate fibers as the reinforcement in such
composites.

25

Introduction and Summary of Background Art

Metal plates, pins, rods, and screws are used
for rigid internal fixation of bones and tendons which
have been damaged by trauma or reconfigured surgically to
30 correct defects occurring congenitally, developmentally or
as the result of disease. These devices are most commonly
fabricated from stainless steel and align bone fragments
by bringing their edges into close proximity. Due to
device structural stiffness they control relative motion
35 to allow bone union. For healing, the stabilization must
persist for several weeks or months without device break-

-2-

age or loosening. While the level of relative motion that can be tolerated has not been thoroughly determined, it is understood that gross motion at the fracture site will result in non-union of the bone fragments.

5 While metal devices of the type well known in the art can hold fragments in close proximity, they may at times interfere with proper healing. This has been traced to their extreme rigidity. It has been demonstrated that completion of healing is prevented by permanent highly
10 rigid fixation of the bone fragments. This is because much of the load that is normally carried by the bone is transferred across the fracture site by the implant. This load transfer is brought about by a mismatch between the elastic modulus of the bone and the metal implant ($E_{\text{bone}} =$
15 $6-20 \text{ Gpa}$ and $E_{\text{metal}} = 100-200 \text{ Gpa}$). The stress-shielded bone heals incompletely or may even remodel so that the shielded area is susceptible to refracture when the implant is removed.

 Another problem inherent in the metal fixation
20 implants used heretofore is that they generally need to be surgically removed after they have served their desired function. This is done to eliminate pain (which can be caused by local corrosion, tissue pressure or friction related to loosening), or at the suggestion of the surgeon
25 where he or she believes this represents the patient's best interest. This removal involves a second surgery, with its attendant costs and risks.

 Some attempts at reducing the rigidity of fixation implants have included the use of permanent
30 implants made from titanium alloys, polymers and carbon-reinforced polymers such as nylon, polyether sulphone and polymethylmethacrylate. These implants lessen stress shielding but still may need to be removed after the bone heals.

35 Beginning in 1971, investigators reported the possibility of employing implants fabricated from materi-

-3-

als which gradually break down or dissolve when placed in the body. An implant formed of a biodegradable material, which meets basic design criteria, including biocompatibility (sterilizability and low toxicity), compatibility for intraoperative reshaping (where needed) and sufficient initial strength and stiffness, has two major advantages over conventional implants: (a) It allows gradual load transfer to the healing bone as it degrades and (b) It eliminates the need for surgical removal.

The earliest reported use of an resorbable polymer for fracture fixation was described by Kulkarni et al. in the J. Mater. Res. 5, pp. 169-181 (1971). He successfully used extruded rods of poly(lactic acid) to reduce mandibular fractures in dogs.

More recently the number of reports dealing with the use of biodegradable polymers and composites for fracture fixation has increased dramatically. At least 63 articles on the subject have appeared as of the date of this application. The most common materials of construction for these articles are poly(lactic acid) and poly(glycolic acid). Other materials also have been used. Typical references in the literature and the materials they describe include:

H. Alexander et al. "Development of new methods for phalangeal fracture fixation," J. Biomech., 14(6), pp. 377-387 (1981) - poly(levo lactic acid) "PLLA" rods;

P. Christel et al. "Biodegradable composites for internal fixation," in Advances in Biomaterials 3, Biomaterials 1980, ed. G.D. Winter et al. 3, 1982, pp. 271-280 - combinations of poly(d/l lactic acid) "PDLLA" and PLLA, as well as polyglycolic acid "PGA";

M. Vert et al. "Bioresorbable plastic materials for bone surgery," Macromolecular Biomaterials ed. Hastings et al. 1984, pp. 120-142 - combinations of "PDLLA" and PLLA;

-4-

D. Lewis et al. "Absorbable fixation plates with fiber reinforcement", Trans. Soc. Biomater., 4, p. 61 (1981) - PDLA reinforced with alumina, alumina-boria-silica and carbon;

- 5 J. Kilpikari et al "Carbon fibre reinforced biodegradable and non-biodegradable polymers as bone plate materials," Trans. Soc. Biomater., 7, p. 242 (1984) - PGA/PLA copolymers with and without carbon reinforcement;

- 10 L. Claes et al. "Refixation of osteochondral fragments with resorbable polydioxanone pins in animal experiments", Trans. Soc. Biomater., 8, p. 163 (1985) - the poly(ethyl ether) polydioxanone;

- R.H. Wehrenberg, "Lactic acid polymers: strong, degradable thermoplastics," Mater. Eng., 94 (3), pp. 63-66 (1981) - copolymers of L-lactide and epsilon-caprolactone, as well as polycaprolactone "PCL";

- 20 X.D. Feng et al. "Synthesis and evaluation of biodegradable block copolymers of epsilon-caprolactone and d,l-lactide," J. Polym. Sci.: Polym. Letters Ed., 21, pp. 593-600 (1983) - PCL and various PCL/PDLA copolymers;

- V. Sknondia et al. "Chemical and physicommechanical aspects of biocompatible orthopedic polymer (BOP) in bone surgery," J. Int. Med. Res., 15 (5), pp. 293-302 (1987) - N-vinylpyrrolidone/methylmethacrylate copolymers;

A.C. Ibay et al. "Synthesis and properties of polymers for biodegradable implants," Polym. Mater. Sci. Eng., 53, pp. 505-507 (1985)- polypropylene fumarate;

- 30 J. Kohn et al. "Poly(iminocarbonates) as potential biomaterials." Biomaterials, 7(3), pp. 176-182 (1986) - polyiminocarbonate;

- A.J. Owen, "Some dynamic mechanical properties of microbially produced poly-beta-hydroxybutyrate/beta-hydroxyvalerat copolymers," Colloid & Polymer Science, 263, pp. 799-803 (1985), among several - copolymers of polyhydroxybutrat /polyhydroxyvalerate;

-5-

S.W. Shalaby et al. "Absorbable polyesters with structure modulated biological properties," Trans. Soc. Biomater., 8, p. 212 (1985) - polyalkylene oxalates; and

L. Claes et. al. "Resorbable implants for the treatment of bone defects," Trans. Soc. Biomater., 11, p.499 (1988) - polyester-amide.

Typical fibers used as reinforcements in these composites are carbon fibers and other nondegradable materials, biodegradable inorganic polymers and biodegradable organic polymers. Some of the reinforcements used in these prior studies have been nonerodible - for example, carbon fibers, glass filaments and the like. While these materials can give dramatic increases in initial strength to composites over their polymer matrix alone they have the medically unacceptable problem of leaving behind finely divided nondegradable debris when the substrate disappears and also sometimes giving rise to rapid losses of strength during environmental exposure. Typical biodegradable polymers include self-reinforcement where the reinforcement is made of polymers of the same material as the polymer matrix but with the reinforcing polymer having a high degree of orientation of polymer chains for increased strength. In other cases one organic material, for example poly(glycolic acid) fibers, can be used in another organic material such as poly(lactic acid).

While the advantages of biodegradable supports are quite clear, especially their elimination of the need to perform a second surgical procedure to remove them, there are still advances to be made. A major area of interest involves identifying materials which have a proper balance of strength and bioerosion.

This balance is a fine one. For example, much of the work carried out heretofore has focused on PLLA and PDLA. These two materials, while chemically closely related, with one a pure material and the other a mixture

-6-

of two enantiomers of the same compound, illustrate the balance point. Pure PLLA is quite strong, having a tensile strength of about 60 MPa in one type of test. PDLA has a tensile strength of about 40 MPa in the same test, with copolymers falling between these two values. Thus, one could achieve different levels of strength by varying the ratio of the comonomer units. The erosion properties of these materials also vary as a function of composition. Pure PLLA is very durable, or nondegradable, depending on the user's point of view. It retains nearly all of its physical integrity after 150 days of implantation. The same study reported that a 50-50 PLLA-PDLA copolymer degraded to 31% of its initial strength in 30 days of implantation. Many workers in the field have looked at the physical and erosion properties of erodible or degradable polymers, each seeking a composite system which will have physical support properties which lead to optimal healing and degradation properties which lead to prompt clearance of the implant from the system without any premature degradation which would compromise the desired physical properties.

STATEMENT OF THE INVENTION

We now have found a family of composites which offer substantial promise as materials of construction for implantable devices. In the most preferred embodiment, the substrate polymer is an ortho ester formed by the reaction of a ketene acetal having a functionality of two or more with a polyol, which term includes alcohols and phenols. Also in the most preferred embodiment, the reinforcement material in the composites is calcium-sodium metaphosphate ("CSM") fibers.

Thus, in one aspect this invention concerns implantable composites made from these two materials.

-7-

In another aspect, this invention concerns implantable composites fabricated from these ortho ester substrate polymers and an erodible reinforcement, generally.

5 In a further aspect, this invention concerns implantable composites fabricated from the CSM fiber materials and erodible substrates of the art.

In yet another aspect, this invention concerns implantable reinforcement devices fabricated from these
10 materials.

In yet a further aspect, this invention relates to a method of treating the CSM fibers, and the product thereof to make them more compatible with the poly(ortho ester) substrates.
15

DETAILED DESCRIPTION OF THE INVENTION

Brief Description of the Drawings

20 This invention will be described with reference being made to the appended drawings. In these drawings

Figure 1 is a graph illustrating the degradation of certain composites of this invention in simulated internal media as determined by measuring flexural
25 strength;

Figure 2 is a graph illustrating the degradation of certain composites of this invention in simulated internal media as determined by measuring flexural modulus;

30 Figure 3a is a graph illustrating the degradation of certain composites of this invention as well as materials not in accord with this invention in simulated internal media as determined by measuring compressive strength;

35 Figure 3b is a graph illustrating the degradation of certain composites of this invention as well as

-8-

materials not in accord with this invention in simulated internal media as determined by measuring compressive modulus;

5 Figure 4a is a graph illustrating the degradation of certain composites of this invention as well as materials not in accord with this invention in simulated internal media as determined by measuring tensile strength;

10 Figure 4b is a graph illustrating the degradation of certain composites of this invention as well as materials not in accord with this invention in simulated internal media as determined by measuring tensile modulus;

15 Figures 5a and 5b are bar graphs illustrating the improvement in properties of POE materials achieved with reinforcement; and

Figures 6a and 6b are bar graphs illustrating the improvement in properties of poly(lactic acid) materials achieved with reinforcement.

20 Definitions

This invention involves bioerodible composites. The terms "degradable", "erodible", "absorbable", and "resorbable" are used somewhat interchangeably in the literature of this field, with or without the prefix
25 "bio". In this application, these terms will be used interchangeably to describe materials broken down and gradually absorbed or eliminated by the body, whether degradation is due mainly to hydrolysis or mediated by metabolic processes.


30

Ortho Ester Substrates

One preferred group of substrate materials for use in the composites of this invention are the poly(ortho ester) materials formed from ketene acetals and polyols.
35 These materials are described in United States patent number 4,304,767. This patent is incorporated her in by


-9-

reference. These ortho ester polymers have repeating m r units represented by the general formulas:

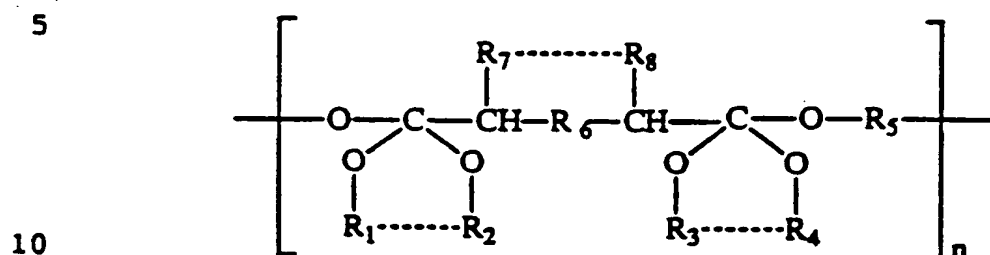

wherein n is an integer substantially greater than 10;
 wherein R₁, R₂, R₃ and R₄ are the same or different
 15 essentially hydrocarbon groups, R₁ and R₂ being separate
 groups or parts of a cyclic group and R₃ and R₄ being
 separate groups or parts of a cyclic group; R₅ is an
 essentially hydrocarbon group which is the residue of a
 polyol R₅(OH)_n wherein n is an integer equal to two or
 20 more, such polyol being a single molecular species or a
 mixture of molecular species; R₆ is a valence bond or an
 essentially hydrocarbon group; R₇ and R₈ are hydrogen or
 essentially hydrocarbon groups which may be separate
 groups or may form parts of a cyclic group; and wherein
 25 such linear chains may be crosslinked to similar chains

and

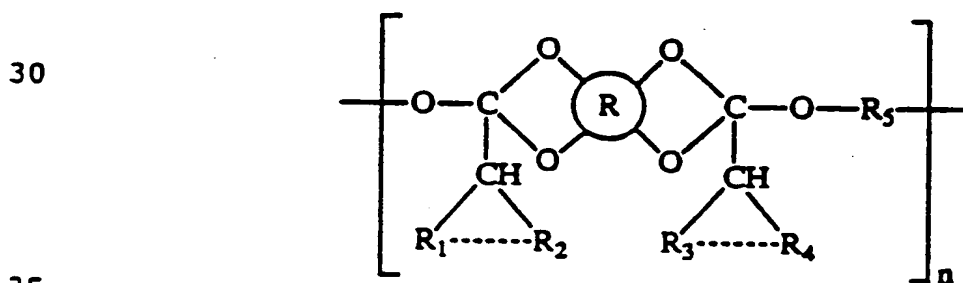


SUBSTITUTE SHEET


-10-

wherein n is an integer substantially greater than 10;
 wherein R_1 and R_2 are hydrogen or the same or different
 essentially hydrocarbon groups and may be separate groups
 5 or may form parts of a cyclic group; \textcircled{R} is a quadrivalent
 organic grouping; R_3 and R_4 are hydrogen or the same or
 different essentially hydrocarbon groups and may be
 separate groups or may form parts of a cyclic group; R_5 is
 10 an essentially hydrocarbon group which is the residue of a
 polyol $R_5(\text{OH})_a$ wherein a is an integer equal to two or
 more, such polyol being a single molecular species or a
 mixture of molecular species; and wherein such linear
 chain may be crosslinked with other similar chains.

These ortho ester polymers are preferably formed
 15 by a condensation reaction between ketene acetals having a
 functionality of two or more and hydroxyl compounds having
 a functionality of two or more. The term "functionality",
 as applied to a ketene acetal, is meant a ketene acetal
 20 group



or




Thus, a di-ketene acetal has a functionality of
 30 two, a tri-ketene acetal has a functionality of three,
 etc. Similarly, where the term "functionality" is used in
 connection with a polyol, it refers to the hydroxyl groups
 present in the polyol.

35 The ketene acetals are of two types.

-11-


The first is as follows:

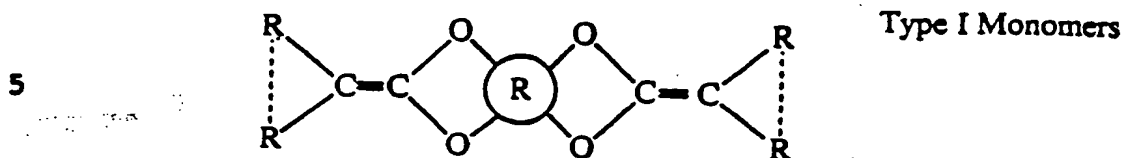

10 wherein the terminal R groups are the same or different, and can be H or essentially hydrocarbon groups, primarily alkyl, aryl, cycloaliphatic or aralkyl groups, and may be saturated or unsaturated, and R is a quadravalent grouping or atom.

15 By "essentially hydrocarbon" is meant that the groups R may contain hetero atoms provided they do not inhibit polymerization with a polyol to an unacceptable degree, do not inhibit degradation of the polymer to an unacceptable degree and do not give rise to toxic or difficultly metabolizable degradation products. The formula-
 20 tion R-R indicates that the two R groups may be joined together to form a cyclic group or may be separate unconnected groups.

The second type of ketene acetal is as follows:

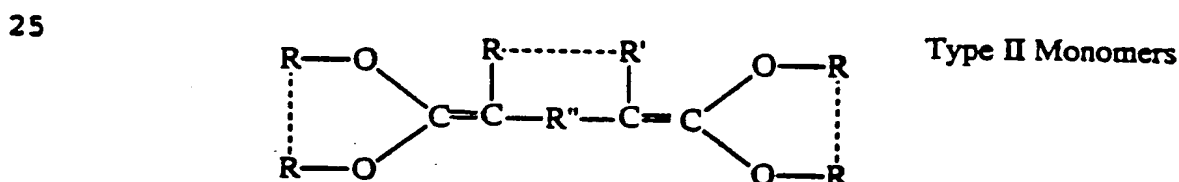

30 wherein the terminal R groups are the same or different essentially hydrocarbon groups, the R' groups are hydrogen or essentially hydrocarbon groups and R'' is a bivalent organic grouping which is also essentially hydrocarbon.


35

SUBSTITUTE SHEET

-12-

Th Typ I monomers cond ns with diols HO--R--OH, R being an essentially hydrocarbon, to produce linear polymers as follows:

5

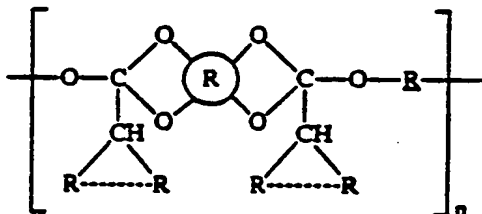


wherein R is derived from the polyol and n is an integer greater than one and usually 100 to 300 or greater.

10

The Type II monomers polymerize with diols to produce linear polymers as follows:

15

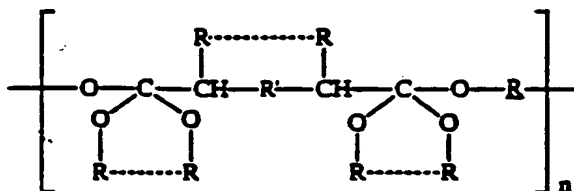

where R and n are similarly defined.

It will be understood that where the polyol and/or the ketene acetal has or have functionalities greater than two, crosslinked polymers will result. As noted below crosslinking may also be achieved by other crosslinking agents.

20


Certain of the diketene acetals which can be used in the present invention are described in Table I.

25


30

35


SUBSTITUTE SHEET

13/1
TABLE 1Structures of Ketene Acetals of Type I


Compound I




Compound II

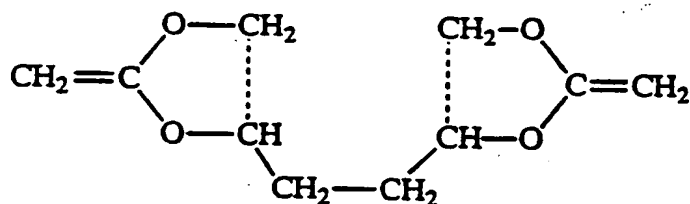


Compound III



Compound IV

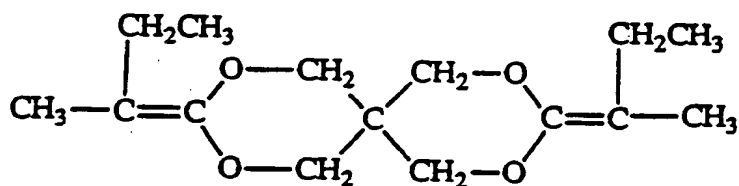

Compound V




Compound VI


SUBSTITUTE SHEET

13/2


TABLE 1 (cont'd.)

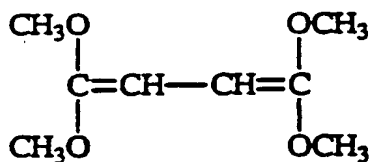Structures of Ketene Acetals of Type II


Compound VII

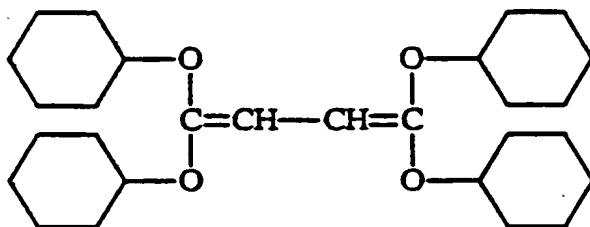

Compound VIII




Compound IX

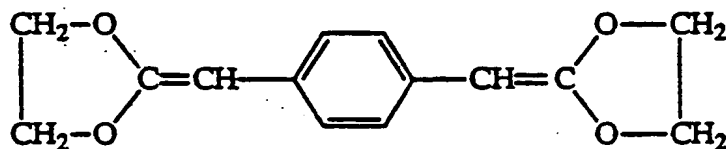

Compound X

-14-

Exemplary polyols suitable as reactants include diols, triols, and the like that can enter into the polymerization reaction without adversely affecting it or the polymeric product. The polyols are known to the art in reported synthesis and they are commercially available. Generally, they include aliphatic diols, triols and the like of the straight or branched chain type. Representative polyols are alkane polyols having a terminal hydroxyl group at the terminus of an alkylene chain of the formula



wherein R is an alkylene chain of 2 to 12 carbon atoms and y is 0 to 6. Typical diols, named as the glycols, include 1,2-propylene glycol, 1,5-pentylene glycol, 3,6-diethyl-1,9-nonylene glycol, trans-cyclohexanedimethanol and the like.

Polyols containing more than 2 reactive hydroxyl radicals suitable for use herein include polyhydroxyl compounds such as 1,2,3,4,5,6-hexanehexol; 1,2,3-propanetriol; 1,5,12-dodecanetriol; 1,2,6-hexanetriol and the like.

Other polyols suitable for synthesizing the poly(ortho esters) include polyglycols containing a repeating glycol monoether moiety $-\text{OCH}_2(\text{CH}_2)_p\text{OH}$ wherein p is 1 to 5.

Additional polyols that can be used in the poly(ortho esters) are polyhydroxyl compounds having 2 or more reactive hydroxyl groups such as pentaerythritol and dipentaerythritol.

Also phenolic polyols (two or more phenolic hydroxyl groups) and mixed phenolic-alcoholic polyols may be employed. Also mixtures of two or more polyols may be employed. Examples of polyols and of mixed phenolic-alcoholic polyols are as follows:

-15-

4,4'-isopropylidenediphenol (bisphenol A);
4-hydroxybenzylalcohol; and non-phenolic polyols having
aromatic linking groups between the hydroxyl groups, e.g.
1,4-dihydroxymethylbenzene. Furthermore, tri- (and
5 higher) hydric phenols may be used such as pyrogallol;
hydroxyhydroquinone; phloroglucinol; and propyl gallate.

Other Substrate Polymers

In some embodiments of this invention the
10 composites may include substrate polymers other than the
above-described ortho esters. These substrate materials
include poly(lactic acid) including "PLLA", "PDLLA" and
combinations of "PLLA" and "PDLLA"; poly(glycolic acid)
("PGA") copolymers of L-lactide and epsilon-caprolactone;
15 polycaprolactone ("PCL"); PCL/PDLLA copolymers;
polypropylene fumarate; polyiminocarbonate; copolymers of
polyhydroxybutrate/polyhydroxyvalerate; poly(alkylene
oxalates); poly(ester-amide) and the polyanhydrides
described by K.W. Leong et al., J. Biomed. Res. Vol 19
20 pp.941-955, (1985) incorporated by reference. These
alternate substrate materials are described in the
references included in the Background section of this
application which references are incorporated herein by
reference.

The CSM Reinforcements

In certain embodiments, the composites of this
invention employ calcium-sodium-methaphosphate ("CSM")
fibers as reinforcements. CSM is described in the United
30 States Patent 4,346,828, which patent is herein in-
corporated by reference. This patent teaches the prepara-
tion and use of asbestiform calcium-sodium-methaphosphate
("CSM") crystals as reinforcement-filler materials. This
material has been promoted by and is available as a
35 developmental scale chemical from Monsanto Company (St.
Louis, Missouri) and has been proposed as use as a

-16-

reinforcer and filler in flooring and roofing materials, friction materials, plastic materials, plastics, resins and elastomers, insulating materials and biomedical materials. The use of these materials in erodible
5 composites for internal medical use is, to our understanding, not disclosed in the literature.

The CSM materials were proposed as an alternative to asbestos. As described by Bruce Monzyk in September-October 1986, Plastics Compounding, pp. 42-46,
10 this material was developed as an insoluble fiber that would degrade naturally if ingested or inhaled. This material, an inorganic covalently bonded polyphosphate having sodium and calcium cations adjacent to and
15 ionically bonded to the polymer can generally be used as distributed by Monsanto. However, when used in combination with the orthoesters, this material may lead to premature breakdown of the orthoester because it tends to have an acidic surface. This can be easily prevented by
20 such as by treating with a silylating agent as will be demonstrated in the preparation section.

The composites of this invention contain at least two materials: a substrate polymer and a fibrous reinforcement. The amount of reinforcement should be an
25 effective reinforcing amount or level. An "effective reinforcing" amount is such as to not be so great as to destroy the continuous phase presented by the polymer matrix and thus degrade the mechanical properties of the composite but large enough to effectively reinforce the
30 substrate. Typically, the weight ratio of substrate to reinforcement is from about 90:10 to about 10:90 with more preferred materials having a ratio of from about 80:20 to about 20:80.

The composites may contain additional materials
35 as well, as long as these additional materials are nontoxic and biocompatible and have physical and

-17-

degradation properties consistent with the intended uses of these composites in erodible implants. Therefore, these composites could contain pharmaceutically acceptable plasticizers, mold release agents, radioimaging materials, or the like. Other materials can be present as well, including excipients to promote or regulate erosion and degradation, and pharmaceutically active materials such as bone growth factors, drugs such as antibiotics or the like.

10 The composites are typically formed by admixing the reinforcement, which is most commonly in a loose fiber form but which could also be in the form of fabrics, felts, or the like, if desired and if compatible with the properties of the reinforcement, with the substrate
15 polymer or a polymer precursor in a fluid state. This material can then be cast into shapes desired for medical reinforcement applications or it can be cast into billets from which the desired shapes can be machined. Alternatively the substrate and fiber can be dry-mixed and
20 formed into the desired shapes by injection molding, hot-pressing, transfer molding and the like. The actual forming techniques employed are known in the art and will depend upon whether the polymer is thermoplastic or thermorigid and also will depend upon whether it is the
25 polymer itself which is being formed or rather a fluid precursor which is then solidified by curing or the like.

 The final form of the reinforcements produced according to the invention can include the various shapes described heretofore for medical reinforcement purposes.
30 These shapes include, without limitation, rods, pins, screws, plates and the like.

-18-

Description of Preferred Embodiments

This invention will be further described by the following examples and representative preparations. These are presented to exemplify the practice of this invention and are not to be construed as limiting its scope.

A study was carried out investigating the suitability of poly(ortho esters) as composite substrates and the suitability of CSM as a composite reinforcement. The polymer investigated was linear poly(ortho ester) (POE) prepared from 3,9-bis-(ethylidene 2,4,8,10-tetraoxa-spiro[5.5]-undecane) and a 60:40 mole ratio of rigid trans-cyclohexanedimethanol and flexible 1,6-hexane-diol. Equivalent, and sometimes superior, results were achieved with the same system and a 90:10 ratio of these alcohols.

A typical preparation of a test quantity of a CSM-reinforced POE composite is as follows:

1. CSM Fiber Preparation - Removal of Impurities:

- add 25 g of calcium-sodium metaphosphate (CSM) fibers (Monsanto) to a 1000 ml beaker with a stirring bar
- add 500 ml of deionized water and boil for 4 hours, maintain volume level of water as needed
- filter the hot suspension with a Buchner funnel under vacuum
- wash fibers with room temperature deionized water
- dry in a vacuum oven at 90-100 C° for 24 hours.

35

-19-

2. Modification of CSM Fiber Surface:

Since the raw fiber surface is slightly acidic and the rate of hydrolysis of poly(ortho ester) (POE) increases with increasing acidity, it is preferred to create a basic fiber surface. To make the CSM fiber more compatible with the POE polymer a basic coupling agent, such as a diamine silane (Dow Corning, Z-6020) may be bonded to the CSM fiber surface. This may be carried out as follows:

- 10 - in a 250 ml beaker add 99.7 ml of methanol (EM Science, OmniSolv) and 0.3 ml of the diamine silane (Dow Corning, Z-6020) to produce a 0.3% solution by volume
- slowly add 25 g of washed CSM fibers to the above solution and stir, using a magnetic stirring bar, 15 until a slurry is formed
- filter the above suspension with a Buchner funnel under vacuum
- dry the residue in an oven for 3.5 hours at 90-100 C^o, using an air flow, to cure the coupling agent 20 to the fiber
- cool to room temperature and sieve the sized fibers through a 100 mesh Tyler sieve screen using a Rototap
- solvent wash the sized fibers with methanol to 25 remove residual coupling agent
- dry sized fibers in a vacuum oven at 90-100 C^o for several hours.

3. Pretreatment of Poly(ortho ester) Polymer:

- 30 - A linear ortho ester polymer (POE) is prepared from 3,9-bis-(ethylidene 2,4,8,10-tetraoxa-
- spiro[5.5]-undecane) and a 60:40 mole ratio of rigid trans-cyclohexanedimethanol and flexible 1,6-hexane-diol using the general methods set forth in the examples of 35 United States patent number 4,304,767. One of the several repeat preparations is carried out as follows:

-20-

Into a 5-L, three-necked flask equipped with an overhead stirrer, an argon inlet tube and a condenser are placed 86.54 g (0.60 mole) trans-cyclohexanedimethanol and 47.33 g (0.40 mole) 1,6-hexanediol and 1.8 L of distilled tetrahydrofuran. The mixture is stirred until all solids have dissolved; then 212.31 g (1 mole) of 3,9-bis(ethylidene 2,4,8,10-tetraoxaspiro [5,5] undecane) is added. The polymerization is initiated by the addition of 2 ml of a solution of p-toluenesulfonic acid (20 mg/ml) in tetrahydrofuran.

The polymerization temperature rapidly rises to the boiling point of tetrahydrofuran, then gradually decreases. Stirring is continued for about 2 hr., 10 ml of triethylamine stabilizer added, and the reaction mixture then very slowly poured with vigorous stirring into about 15 gallons of methanol containing 100 ml of triethylamine.

The precipitated polymer is collected by vacuum filtration and dried in a vacuum oven at 60°C for 24 hrs. The weight of the dried polymer was 346.03 (98.8% yield). The molecular weight determined by light scattering was 95,300.

To make a 90/10, use 129.81 g (0.90 mole) trans-cyclohexanedimethanol, 11.83 (0.10 mole) 1,6-hexanediol and 212.31 g (1 mole) 3,9-bis(ethylidene 2,4,8,10-tetraoxaspiro [5,5] undecane).

- mill the POE polymer through a 40 mesh screen using a Thomas Wiley Mill (Thomas Scientific)

- as a precaution after milling, dry the milled polymer in a vacuum oven at 50°C for 24 hours before using.

4. Preparation of Composites:

Mixing of the powdered POE polymer and the sized CSM fibers is achieved by simply dry-mixing the appropri-

-21-

ate amounts of fiber and polymer depending on the desired fiber loading.

For example to prepare 5 composite samples, at a fiber-volume fraction equal to 30%, for flexure testing according the ASTM Standard D-790 for procedure and sample size, the following steps are carried out:

- in a narrow diameter bottle (dia = 2") add 2.85 g of sized CSM fibers
- sprinkle in a milled POE polymer, 3.15 g total, while blending the fibers with the impeller of a stirring assembly
- use low to medium speed.

5. Hot-Pressing of Composites:

- set and heat the platens of a Carver Press to 150°C
- fill the steel die with 1.20 g of the dry-mixed composite
- transfer the die into the space between the platens and apply 500 lbs-f as a preload
- insert the thermocouple temperature probe into the die
- heat the die to 130°C
- when the die temperature reaches 130°C apply 2000 psi to the mold
- the temperature and pressure will remain constant
- after 5 minutes turn on the cold water to cool the platens and the die; make sure the pressure is at 2000 psi
- when the die temperature decreases to 45°C or less shut off the water, release the pressure and remove the mold and sample
- this yields a composit sample 1-1/2" x 1/2" x 1/16" which is ready for flexure testing.

-22-

Similar processing with other substrates such as other ortho esters or ortho esters having differing ratios of diols, say 90:10 instead of 60:40, or with other types of substrate or reinforcement would yield similar products.

Testing of Materials

Acute toxicity screening was performed on ethylene oxide sterilized samples. Cytotoxicity was determined by agar overlay assay of direct samples. USP Toxicity Class VI tests (systemic and intracutaneous injection of extracts, 37°C for 9 hours) and USP Implantation XXI tests (intramuscular implantation, followed by gross and macroscopic examination) were conducted.

Flexural modulus and flexural strength were measured in accordance with ASTM Standard D 790-81 (3 pt. bend). Specimens were immersed in Tris-buffered saline, pH 5.0 and 7.4 (aerated), at 37°C and tested after 1, 3, and 6 weeks exposure. Another set of specimens was irradiated with 2.5 Mrad of gamma radiation and exposed to aerated Tris-buffered saline, pH 7.4, at 37°C. All mechanical testing was performed in triplicate.

Cytotoxicity, toxicity, and implantation tests indicated that 60:40 POE is non-toxic, with test responses comparable to negative controls. The initial flexural strength and modulus were 65 MPa and 1.6 GPa. The effects of exposure to saline, pH 5.0 and 7.4, at 37°C are shown in Figures 1 and 2. POE retained approximately 90% of its initial flexural strength and modulus at 6 weeks in vitro, and the two pH levels produced no significant difference in the rate of mechanical property degradation. Radiation sterilization reduced initial flexural strength by 60%, had a negligible effect on initial modulus, and markedly increased the degradation rate.

35

-23-

POE shows low toxicity and retains excellent mechanical properties for 6 or more weeks in vitro. Radiation sterilization appears to severely compromise its mechanical properties.

5 Additional studies detailed the initial histological and mechanical properties of the following biodegradable polymer composites: poly(ortho ester) (POE) and copolymers of epsilon-caprolactone/L-lactide (CLLA), in 90:10 and 10:90 ratios, reinforced with degradable glassy
10 sodium-calcium-aluminum-polyphosphate (NCAP) and crystalline calcium-sodium-metaphosphate (CSM), in the form of randomly oriented short fibers.

NCAP fiber and CSM fiber samples were submitted for acute toxicity screening by standard Tissue Culture
15 Agar Overlay Assay (cytotoxicity), USP Class VI (systemic and intracutaneous toxicity) and USP XXI (intramuscular implantation) protocols.

Six composite types were prepared by reinforcing each of 3 polymers (CLLA 10:90, CLLA 90:10 and POE) with
20 either NCAP or CSM fibers and were implanted into New Zealand Rex rabbits to assess the effect of materials on both muscle and bone. ASTM Standards, F496-78 and F361-80 were adopted for muscle and bone implant methodology respectively. Animals were sacrificed at 4, 12 and 26
25 weeks with standard histological analysis performed on retrieved implant/tissue specimens.

Parallel in vitro mechanical degradation studies were performed by immersing composite samples in phosphate buffered saline, pH 7.4, at 37°C, for periods of 6, 12 and
30 26 weeks. Tensile and compressive mechanical properties were determined in triplicate for each exposure period.

Both NCAP and CSM fibers were rated nontoxic in the cytotoxicity, systemic and intracutaneous toxicity and intramuscular implantation. R sponses wer comparable to
35 negative controls.

-24-

After muscle implantations, necrotic foci were observed in 12 of 22 NCAP-containing specimens, while only 2 of 14 CSM-containing specimens and 2 of 11 CLLA 90:10 copolymer specimens showed necrosis. However, the
5 necrosis was localized and associated with the fibrous capsule. None of the implanted sites exhibited the uniform zone associated with gross leeching of toxic substances from the implant material.

Bone histologic examination revealed a mild
10 proliferation of fibrous connective tissue on the periosteal surface for all specimens. This tissue varied in thickness and contained lymphocytes and macrophages. The bone showed no evidence of necrosis or toxicity.

All in vivo and in vitro samples were sterilized
15 with 2.5 MRads of gamma radiation prior to usage. All of the samples containing NCAP fibers showed some discoloration after irradiation, and therefore possibly some degradation.

Figures 3a and 3b show compressive strength and
20 stiffness after in vitro exposure. CLLA 10:90 and POE polymers with NCAP fibers started out much stiffer and stronger than the rest, but degraded quickly.

Figures 4a and 4b show tensile strength and
25 stiffness after in vitro exposure. Both CLLA 10:90/NCAP and POE/CSM started out with relatively high stiffness and strength, but only POE/CSM retained significant strength at 6 and 12 weeks. CLLA 10:90/NCAP had the highest modulus initially, but at 6 weeks, POE/CSM was several times stiffer than all other materials.

30 Other results of mechanical tests on pure ortho ester and lactic acid substrates and reinforced composites based on these substrates are presented in Figures 5a, 5b, 6a and 6b. These results show that the CSM fibers

35

-25-

effectively reinforce both systems and that treating the CSM surface with silane coupling agent improves composite integrity with the poly(lactic acid) materials and with the POE materials.

5

10

15

20

25

30

35

-26-


What is claimed is:

1. A reinforced bioerodible composite having a polymer substrate phase and dispersed therethrough a fiber
5 reinforcement phase, the substrate phase being selected from the group consisting of poly(ortho ester), poly(levo lactic acid), poly(d/l lactic acid), poly(glycolic acid), the poly(ethyl ether) polydioxanone, L-lactide, epsilon-caprolactone, polycaprolactone, polyanhydrides,
10 polypropylene fumarate, polyiminocarbonate, polyhydroxybutrate, polyhydroxyvalerate, poly(alkylene oxalate) and poly(ester-amide) and mixtures and copolymers thereof and the reinforcement phase being selected from the group consisting of calcium-sodium metaphosphate,
15 calcium phosphate, oriented poly(glycolic acid), oriented poly(lactic acid), sodium-calcium-aluminum polyphosphate, and mixtures thereof, subject to the proviso that when the substrate is other than poly(ortho ester), the reinforcement must include calcium-sodium metaphosphate
20 and that when the reinforcement is other than calcium-sodium metaphosphate, the substrate must include poly(ortho ester).
2. A reinforced bioerodible composite having a
25 poly(ortho ester) substrate phase and dispersed therethrough a fiber reinforcement phase.
3. The reinforced bioerodible composite of
claim 2 wherein the polymer substrate phase is a
30 poly(ortho ester) of polyols and ketene acetals each having a functionality of two or more.

35

-27-

4. The reinforced bioerodible composite of claim 3 wherein the poly(ortho ester) has the formula

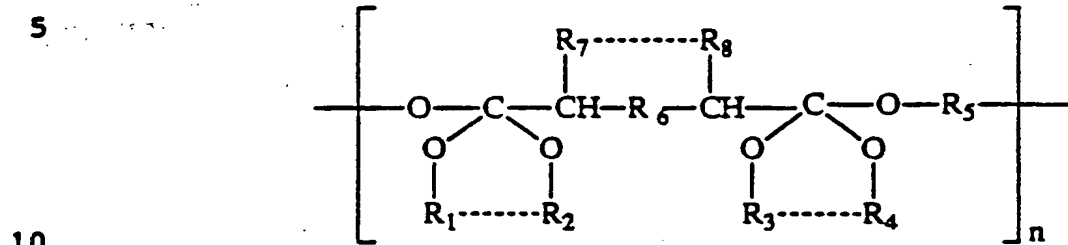


wherein n is an integer substantially greater than 10;
 wherein R_1 , R_2 , R_3 and R_4 are the same or different
 15 essentially hydrocarbon groups, R_1 and R_2 being separate
 groups or parts of a cyclic group and R_3 and R_4 being
 separate groups or parts of a cyclic group; R_5 is an
 essentially hydrocarbon group which is the residue of a
 polyol $R_5(\text{OH})_n$ wherein n is an integer equal to two or
 20 more, such polyol being a single molecular species or a
 mixture of molecular species; R_6 is a valence bond or an
 essentially hydrocarbon group; R_7 and R_8 are hydrogen or
 essentially hydrocarbon groups which may be separate
 groups or may form parts of a cyclic group; and wherein
 25 such linear chains may be crosslinked to similar chains.

30

35

-28-

5. The reinforced bioerodible composite of claim 3 wherein the poly(ortho ester) has the formula

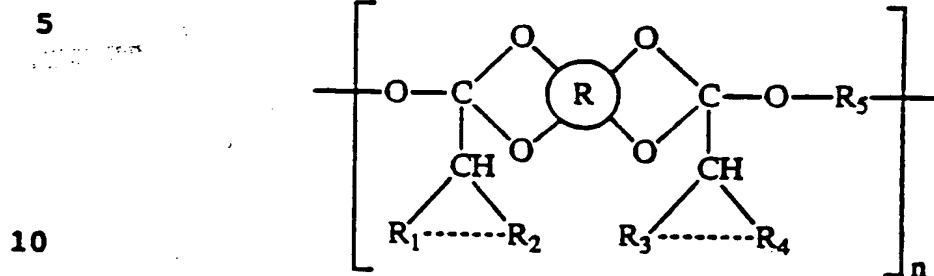

wherein n is an integer substantially greater than 10;
 wherein R_1 and R_2 are hydrogen or the same or different
 essentially hydrocarbon groups and may be separate groups
 or may form parts of a cyclic group; R is a quadrivalent
 organic grouping; R_3 and R_4 are hydrogen or the same or
 different essentially hydrocarbon groups and may be
 separate groups or may form parts of a cyclic group; R_5 is
 an essentially hydrocarbon group which is the residue of a
 polyol $R_5(OH)_a$ wherein a is an integer equal to two or
 more, such polyol being a single molecular species or a
 mixture of molecular species; and wherein such linear
 chain may be crosslinked with other similar chains.

6. A reinforced bioerodible composite having an
 erodible polymer substrate phase and dispersed
 therethrough a calcium-sodium metaphosphate fiber re-
 inforcement phase.

7. In a medical implant for use within the body
 and formed of a reinforced bioerodible composite capabl
 of undergoing bioerosion within the body, the improvement
 comprising employing as said reinforced bioerodible
 composit a material of claim 1.

SUBSTITUTE SHEET

-29-

8. In a medical implant for use within the body and formed of a reinforced bioerodible composite capable of undergoing bioerosion within the body, the improvement comprising employing as said reinforced bioerodible composite a material of claim 2.

9. In a medical implant for use within the body and formed of a reinforced bioerodible composite capable of undergoing bioerosion within the body, the improvement comprising employing as said reinforced bioerodible composite a material of claim 3.

10. In a medical implant for use within the body and formed of a reinforced bioerodible composite capable of undergoing bioerosion within the body, the improvement comprising employing as said reinforced bioerodible composite a material of claim 4.

11. In a medical implant for use within the body and formed of a reinforced bioerodible composite capable of undergoing bioerosion within the body, the improvement comprising employing as said reinforced bioerodible composite a material of claim 5.

12. In a medical implant for use within the body and formed of a reinforced bioerodible composite capable of undergoing bioerosion within the body, the improvement comprising employing as said reinforced bioerodible composite a material of claim 6.

13. Calcium-sodium metaphosphate fibers particularly adapted for incorporation into poly(ortho ester) substrated composites, said fibers having been treated to block acidic sites present on their surface.

1 / 5

FIG. 1


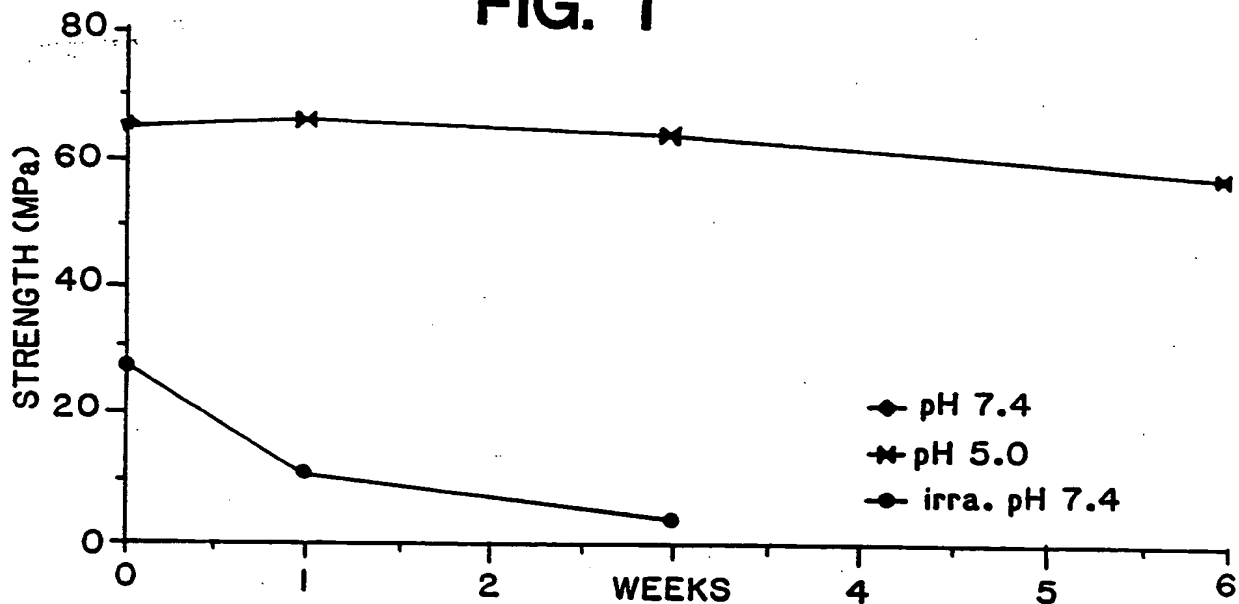


FIG. 2

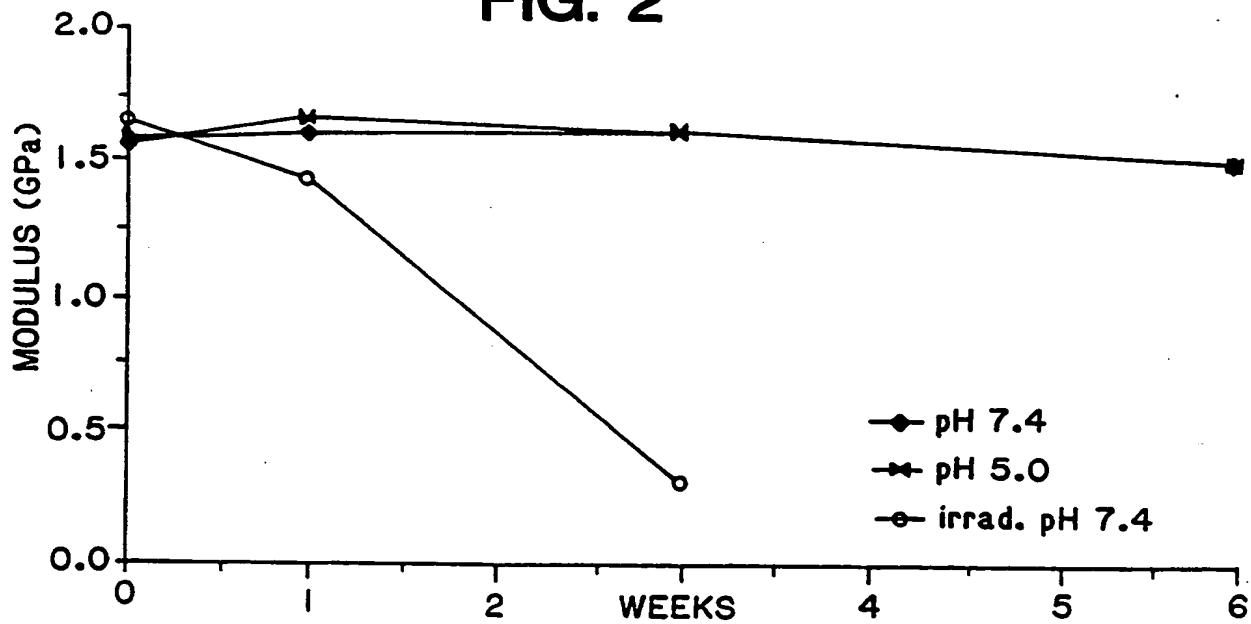

2 / 5

FIG. 3a


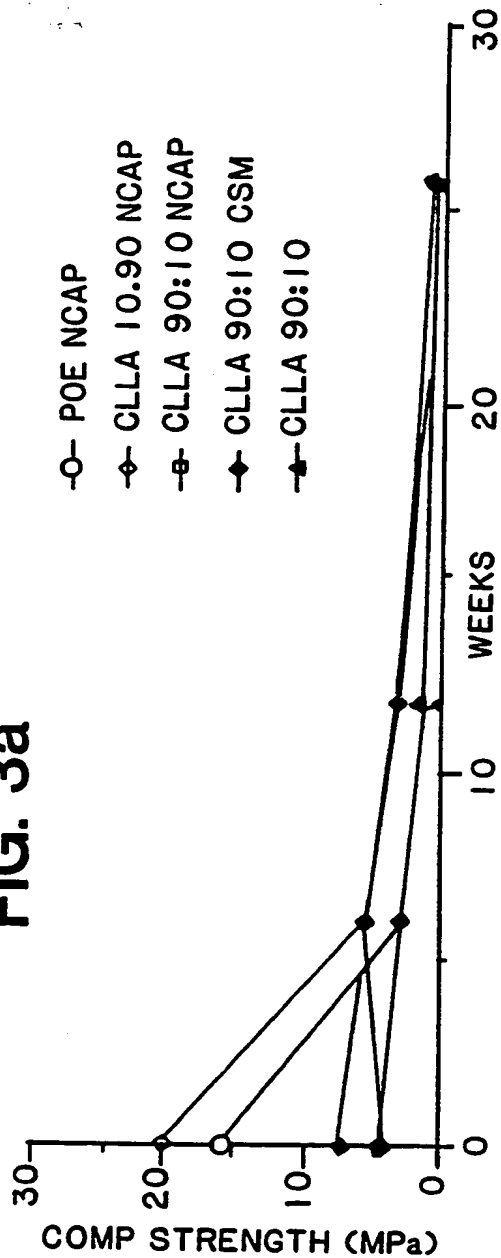


FIG. 3b

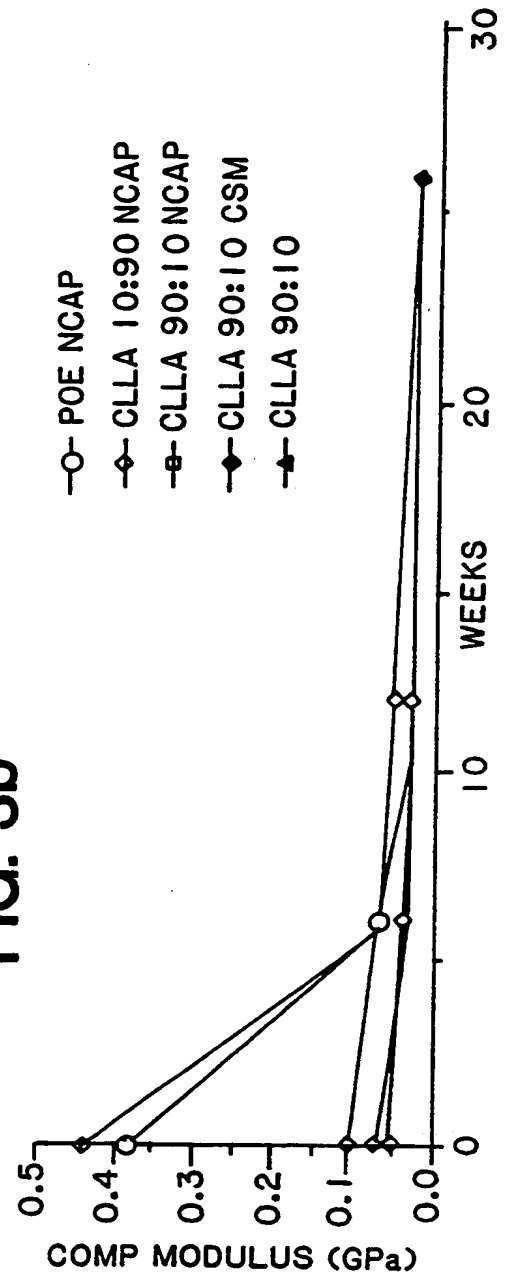

SUBSTITUTE SHEET

3 / 5

FIG. 4a




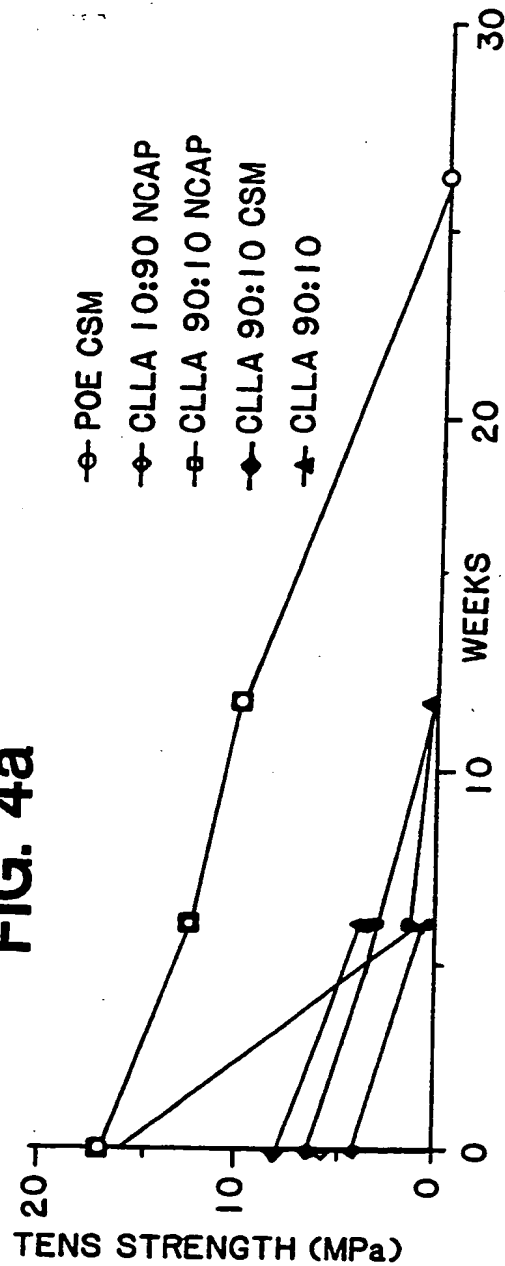


FIG. 4b

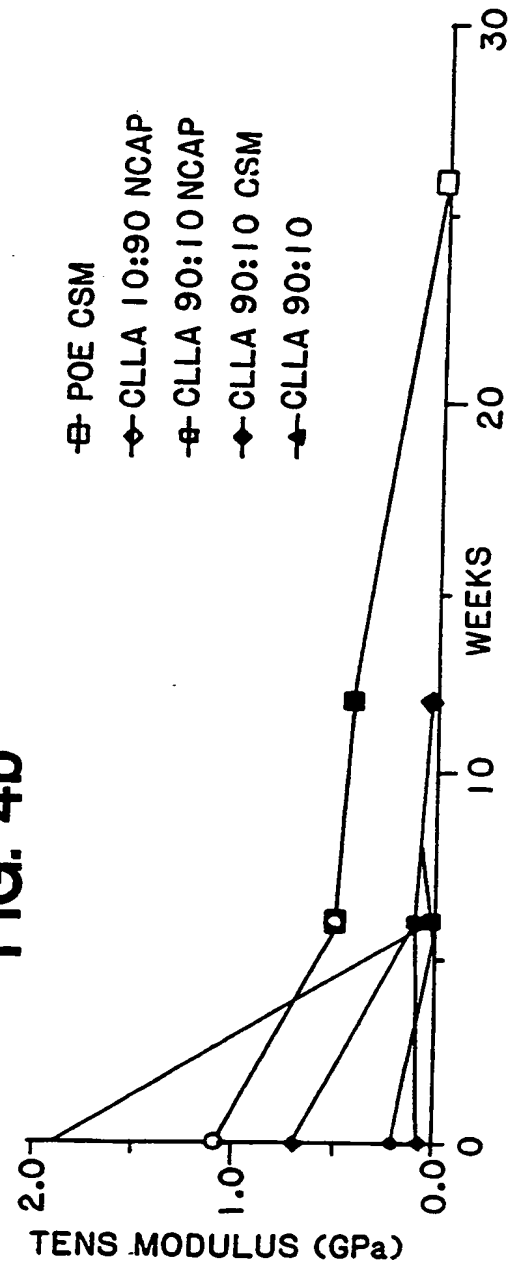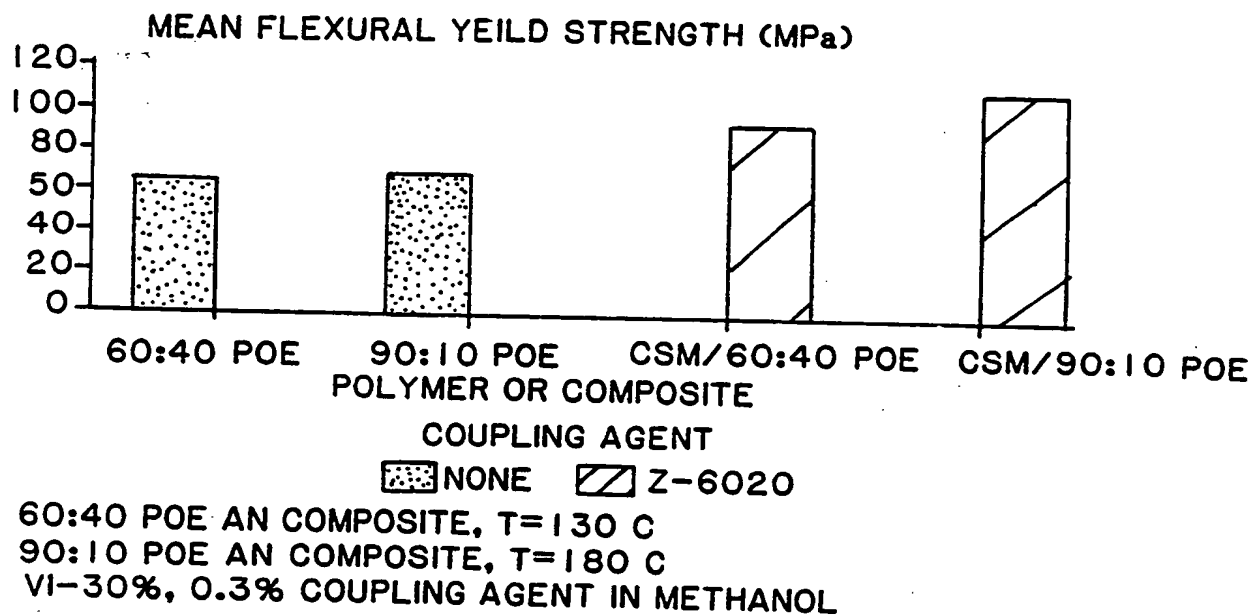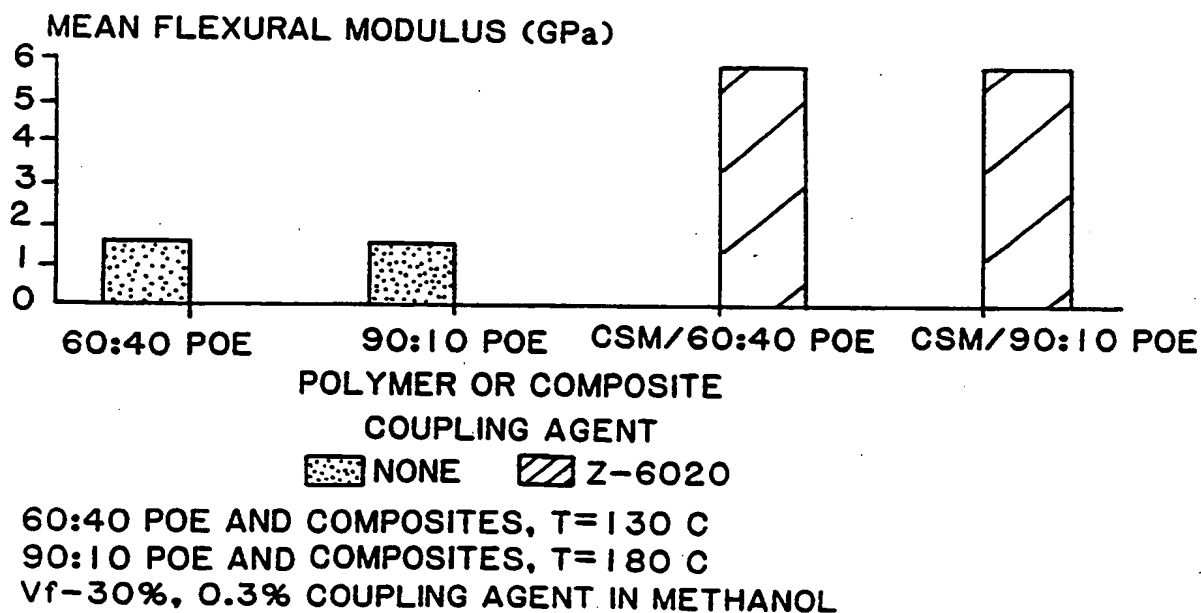

4 / 5

FIG. 5a**FIG. 5b**

5 / 5

FIG. 6a


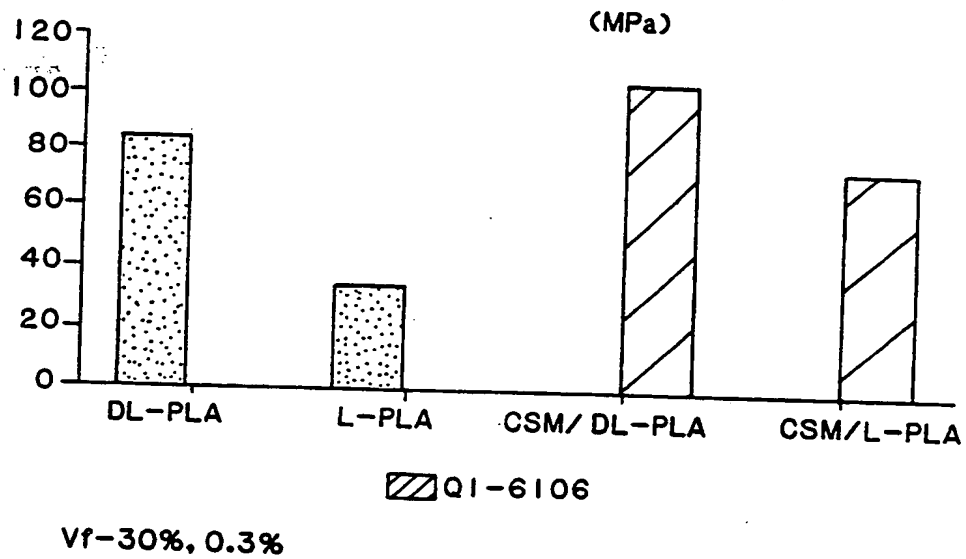


FIG. 6b

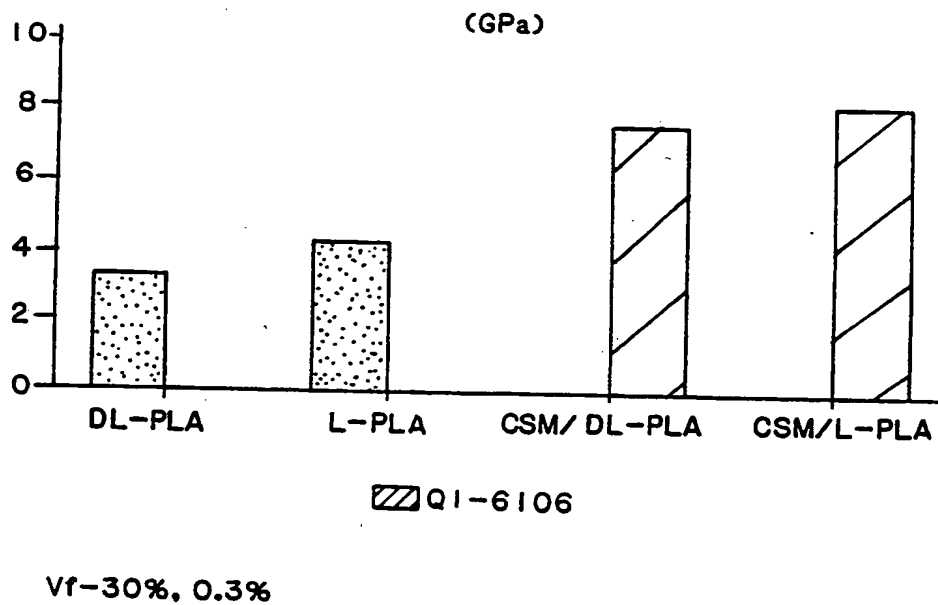

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International Application No PCT/US 90/02281

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) *

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC⁵: A 61 L 27/00, C 01 B 25/45, C 08 G 63/66, 65/34

II. FIELDS SEARCHED

Minimum Documentation Searched *

Classification System

Classification Symbols

IPC⁵

A 61 L

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched *

III. DOCUMENTS CONSIDERED TO BE RELEVANT *

Category *	Citation of Document, ** with indication, where appropriate, of the relevant passages **	Relevant to Claim No. **
X	EP, A, 0031223 (MONSANTO CO.) 1 July 1981, see page 13, lines 7-36; claims --	1
Y	US, A, 4304767 (J. HELLER et al.) 8 December 1981, see claims 1-30 (cited in the application) --	1-13
Y	Fundamental and Applied Toxicology, vol. 11, 1988 Soc. of Toxicology A.P. Li et al.: "In vitro evaluation of the cytotoxic potential of a novel man-made fiber, calcium sodium metaphosphate fiber (phosphate fiber)" pages 21-28, see page 21, lines 1-15; page 27 --	1-13
A	EP, A, 0146398 (SOUTHERN RESEARCH INSTITUTE) 26 June 1985, see claims 1-22 --	1-13

* Special categories of cited documents: **

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

IV. CERTIFICATE

Date of the Actual Completion of the International Search

18th July 1990

Date of Mailing of this International Search Report

28. 08. 90

International Searching Authority

EUROPEAN PATENT OFFICE

Signature of Authorized Officer

M. SOTELO

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, " with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	GB, A, 2169914 (MITSUBISHI MINING & CEMENT CO. LTD) 23 July 1986	
A	US, A, 4717487 (E.J. GRIFFITH et al.) 5 January 1988	

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

US 9002281

SA 36867

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 20/08/90. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A- 0031223	01-07-81	AT-T- E6762	15-04-84
		AT-T- E7883	15-06-84
		AU-B- 537661	05-07-84
		AU-A- 6535280	18-06-81
		AU-B- 537662	05-07-84
		AU-A- 6535380	18-06-81
		CA-A- 1160019	10-01-84
		CA-A- 1155632	25-10-83
		EP-A, B 0031222	01-07-81
		JP-A- 56096708	05-08-81
		JP-A, B, C 56096709	05-08-81
		US-A- 4360625	23-11-82
US-A- 4304767	08-12-81	US-A- 4346028	24-08-82
		AT-B- 384615	10-12-87
		AU-B- 543991	09-05-85
		AU-A- 7175381	07-12-81
		BE-A- 888829	28-08-81
		CA-A- 1186438	30-04-85
		CH-A- 657369	29-08-86
		EP-A, B 0051667	19-05-82
		GB-A, B 2086404	12-05-82
		JP-A- 60221424	06-11-85
		JP-A- 60214745	28-10-85
		NL-T- 8120177	01-04-82
		SE-B- 455791	08-08-88
		SE-A- 8200068	08-01-82
		WO-A- 8103278	26-11-81
EP-A- 0146398	26-06-85	US-A- 4655777	07-04-87
		CA-A- 1261991	26-09-89
		JP-A- 60153868	13-08-85
GB-A- 2169914	23-07-86	JP-A, B, C 61135671	23-06-86
		CH-A- 666281	15-07-88
		DE-A, C 3542535	05-06-86
		NL-A- 8503340	01-07-86
US-A- 4717487	05-01-88	AU-B- 593960	22-02-90

EPD FORM 10479

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

US 9002281

SA 36867

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 20/08/90
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4717487		AU-A- 8213887	09-06-88
		EP-A- 0271471	15-06-88
		JP-A- 63159209	02-07-88

KPO FORM 10479

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82